


V NK1-*1-1


M6 thread depth 12. To mount the pump, n.4 MB screws, with a torque wrench setting fixed at 27 ± 3 Nm.

Shaft M7 nut, with a torque wrench setting fixed at 8 Nm.

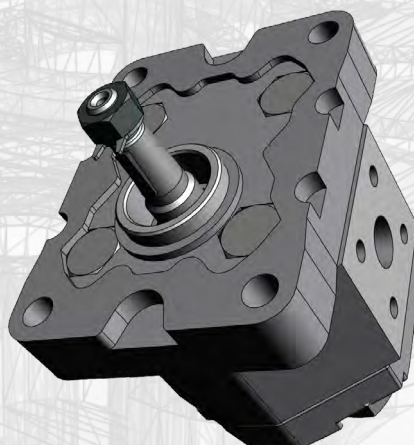

OUTLET


INLET

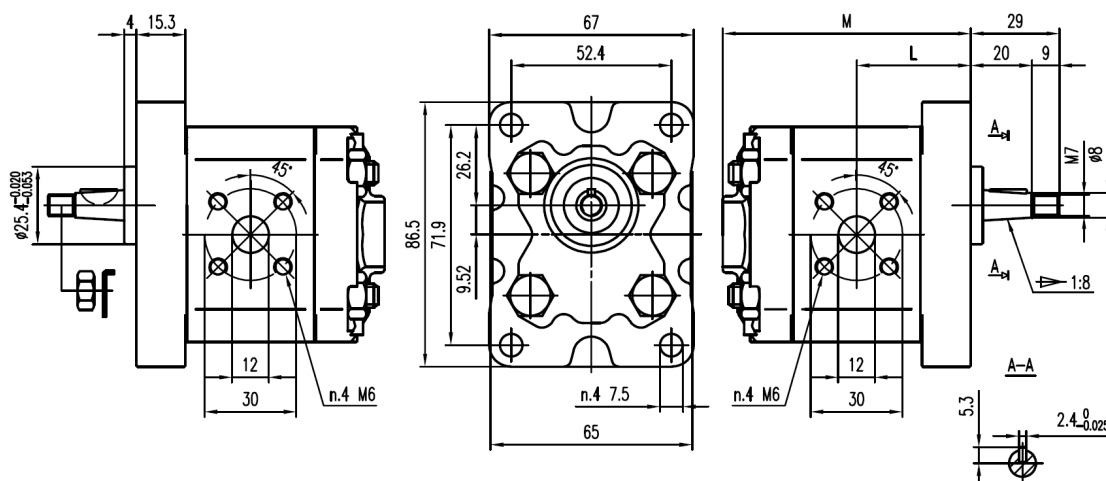


Type	Displacement cm ³ /rev	Max. Pressure			Max. Speed r/min	Min. Speed r/min	Dimensions	
		P1	P2	P3			M	L
VNK-1-0.8-1-1-*-*	0.8	250	270	290	6000	1000	73.5	32.8
VNK-1-1.1-1-1-*-*	1.1	250	270	290	6000	1000	74	33
VNK-1-1.3-1-1-*-*	1.3	250	270	290	6000	1000	75	33.5
VNK-1-1.6-1-1-*-*	1.6	250	270	290	6000	1000	76	34
VNK-1-1.8-1-1-*-*	1.8	250	270	290	6000	1000	77	34.5
VNK-1-2.1-1-1-*-*	2.1	250	270	290	6000	1000	78	35
VNK-1-2.7-1-1-*-*	2.7	250	270	290	6000	800	80	36
VNK-1-3.2-1-1-*-*	3.2	250	270	290	5000	800	82	37
VNK-1-3.7-1-1-*-*	3.7	250	270	290	4500	800	84	38
VNK-1-4.2-1-1-*-*	4.2	250	270	290	4000	800	86	39
VNK-1-4.8-1-1-*-*	4.8	230	250	270	3500	600	88	40
VNK-1-5.8-1-1-*-*	5.8	230	250	270	3000	600	92	42
VNK-1-7-1-1-*-*	7	210	230	250	2500	600	96	44
VNK-1-8-1-1-*-*	8	180	200	230	2100	600	100	46
VNK-1-9.8-1-1-*-*	9.8	150	170	190	2100	600	104	48



FRONT COVERS

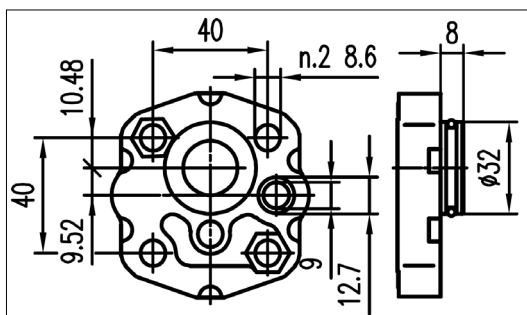


B

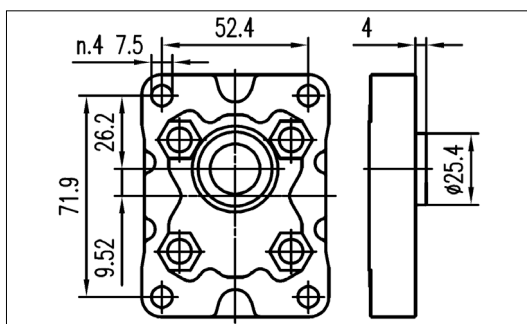

1


SHAFTS

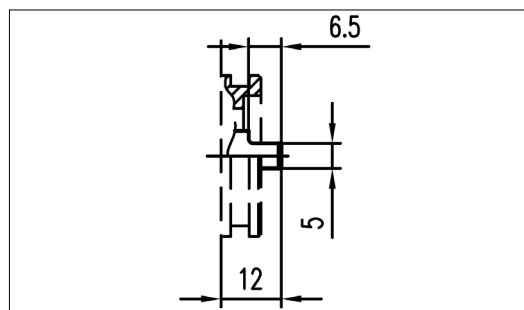

02

Max. Torque


20 Nm

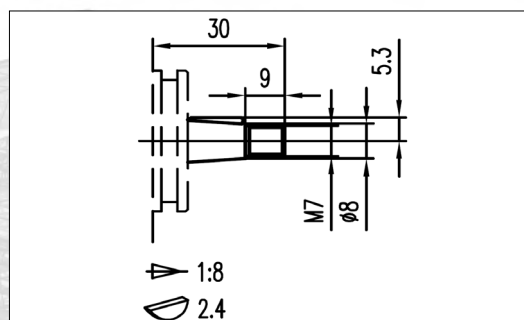

1

Max. Torque


20 Nm

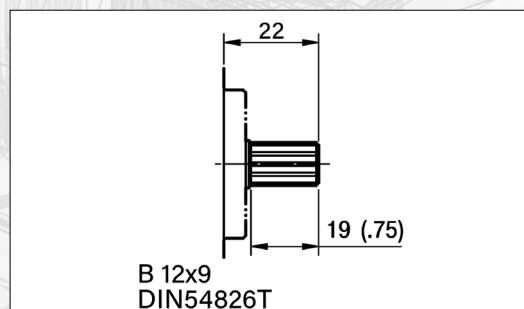

7




PORTS

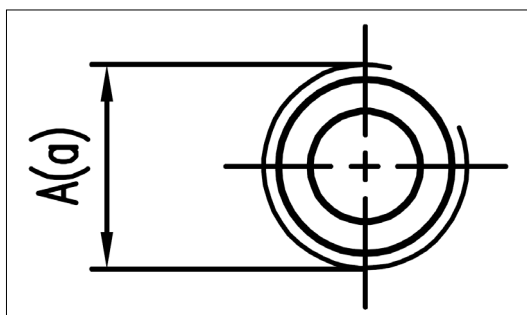


3838

INLET	OUTLET
A	a
G3/8	G3/8

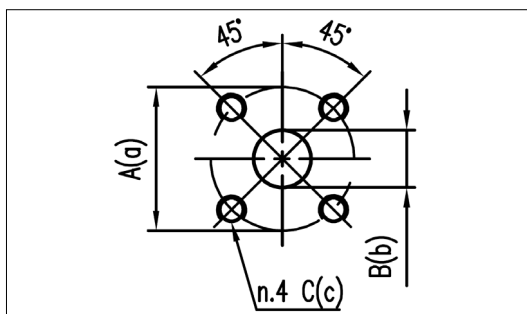


3030

INLET			OUTLET		
A	B	C	a	b	c
30	12	M6	30	12	M6

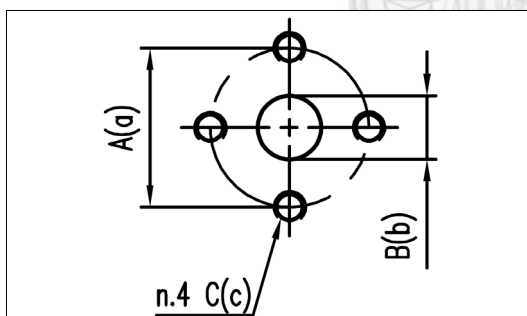

3030R

INLET			OUTLET		
A	B	C	a	b	c
30	12	M6	30	12	M6

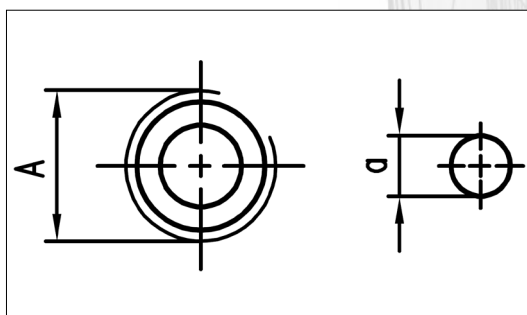

380R

INLET	OUTLET
A	a
G3/8	ø9

